





## V 20 weld-on™

### Flexibility




### Dimensions



### USE:

- For increased rotational flexibility with a Larsen connection to pipe

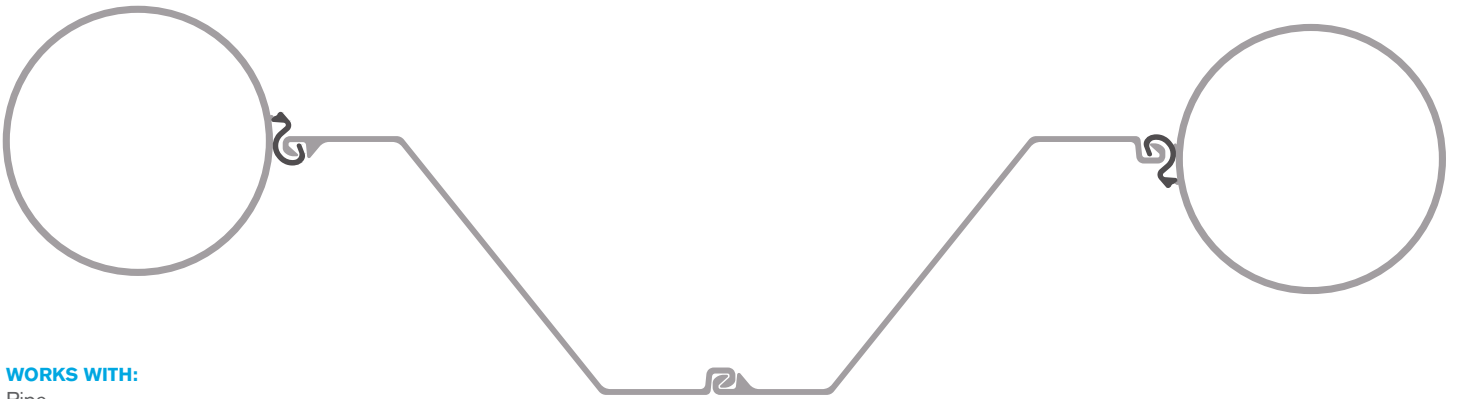

### WORKS WITH:

Pipe  
AZ 12-770, AZ 13,  
AZ 13-770, AZ 14-770,  
AZ 17, AZ 17-700, AZ 18,  
AZ 18-700, AZ 19,  
AZ 19-700, AZ 24-700,  
AZ 25, AZ 26, AZ 26-700,  
AZ 28, AZ 28-700,  
AZ 36-700N, AZ 38-700N,  
AZ 40-700N, AZ 42-700N,  
AZ 44-700N, AZ 46,  
AZ 46-700N, AZ 48,  
AZ 50, EZ80, EZ88, EZ95, H 1807, H 2507, H  
2607, H 2707, H 2807, H 3907, MSZ18 312,  
MSZ18 340, MSZ18 350, MSZ18 375, MSZ18  
406, MSZ19 340, MSZ19 350, MSZ19 375,  
MSZ19 406, SKZ 20,  
SKZ 22, SKZ 23, SKZ 24, SKZ 25, SKZ 31, SKZ  
33, SKZ 34, SKZ 36,  
SKZ 38, XZ100, XZ105, XZ85, XZ90, XZ95

### WEIGHT:

~ 8.9 lb/ft

### TYPICAL STEEL GRADE:

ASTM A572 Gr. 50/S355GP  
or higher.

For additional details and "works with" list,  
visit [pilepro.com/v20\\_weldon](http://pilepro.com/v20_weldon)