



WOM-S®/WOF-S®

Flexibility



Dimensions



USE:


- For O-Pile and O-Pile: DTH systems using Down the Hole drilling; the only SSP systems that can be driven through solid rock.

Combined Width \approx 62 mm (2.4")

Connector Thickness \approx 12 mm (.47")

Interlock Strength = 132.9 kips/foot (1,940kN/m)*

*Test connection piece was 1000mm

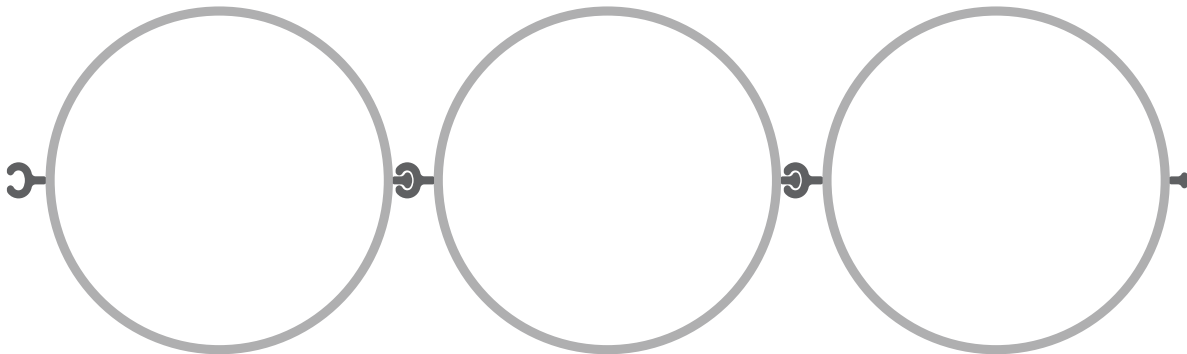

FITS:

Pipe

WOM-S WEIGHT:

~ 2.4 lb/ft
~ 3.8 kg/m

WOF-S WEIGHT:

~ 7.5 lb/ft
~ 11.2 kg/m

TYPICAL STEEL GRADE:

ASTM A572 Gr. 50/S355GP
or higher.

For additional details and CAD files
visit pilepro.com/woms or pilepro.com/wofs