

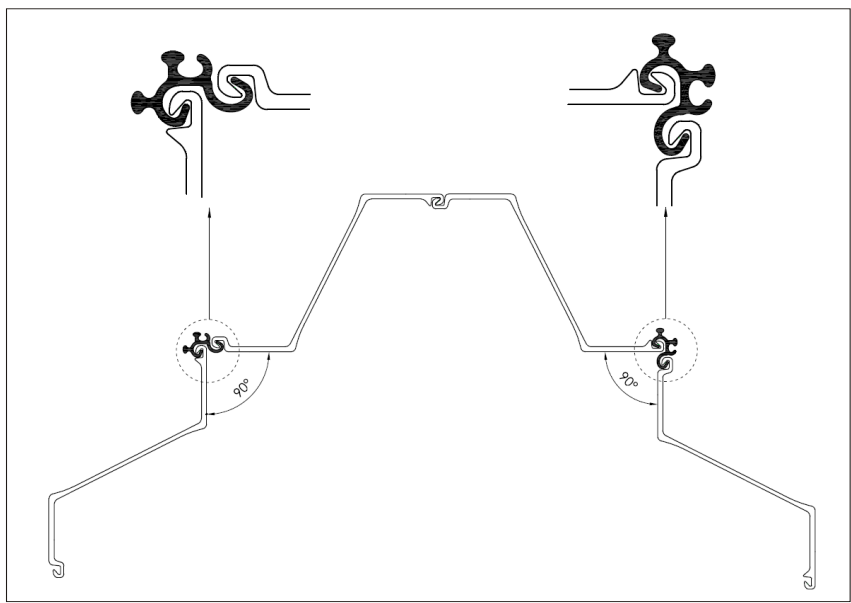
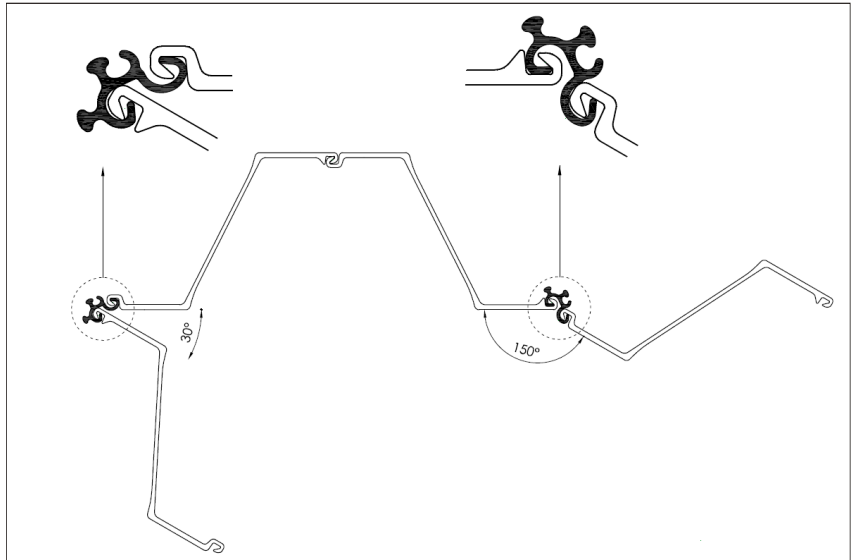


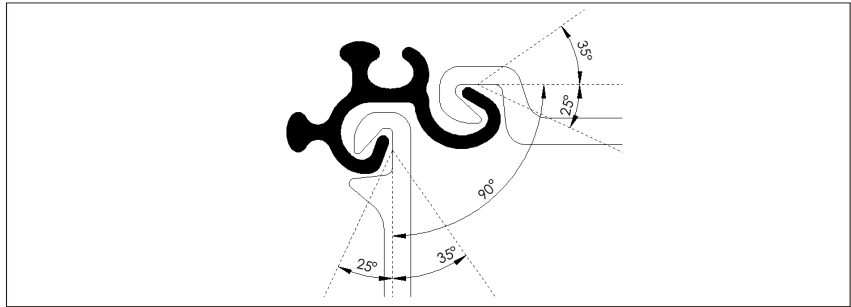

**Applications:**

1. ANY-Z® is designed to work with ANY HOT ROLLED Z sheet pile section:
  - A) 90° (with angular flexibility) - 2 way connections
  - B) Tee connector (with angular flexibility) - 3 way connections, you may need two ANY-Z.
  - C) Connect ANY HOT ROLLED Z sheet pile to ANY HOT ROLLED Z sheet pile.
2. ANY-Z® is designed to work with ANY COLD ROLLED Z sheet pile section ( that is less than 11mm thick.)
  - A) 90° (with angular flexibility) - 2 way connections
  - B) Tee connector (with angular flexibility) - 3 way connections, you may need two ANY-Z®.
  - C) Connect ANY COLD ROLLED Z sheet pile to ANY COLD ROLLED Z sheet pile (that is less than 11mm thick.)

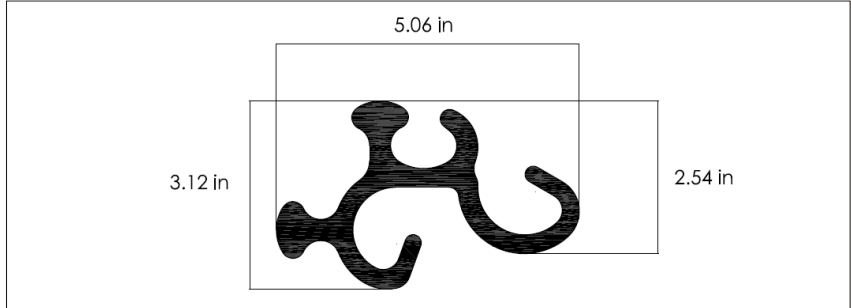

**Typical Properties:**

Steel grade: ASTM A572 Grade 50 (S 355 GP)  
Weight per linear foot: ~14.60 pounds

**CAD-Service**

Downloads of data sheets and CAD files are available at [www.pilepro.com](http://www.pilepro.com)

**Certificates:**



**Installation Guidelines**

1. Please review proper interlocking examples as shown.
2. Thread the connector into the interlock while the sheet pile is out of the ground.
3. Adjust the connector to the appropriate position.
4. Tack or spot-weld the connector in place (typically a 10" weld attaching the connector to the sheet pile at the top is sufficient).
5. Drive/extract the sheet (with the connector attached) as you would normally.

**Please note:**

1. Swing or rotation stated are typical but can vary by 10° or more due to rolling tolerances found in sheet pile interlocks.
2. PilePro® connectors are protected by patents.