



Application description below applies only to hot rolled sheet piling!

Applications:





1. 90° corner connection with swivel range of ~30° to ~130°.
2. Suitable for circular driving with double sheet piles.

Typical Properties:

Steel grade: ASTM A572 Grade 50 (S 355 GP)
 Weight per linear foot: 5.64 pounds (8.4 kg per meter)

CAD-Service

Downloads of data sheets and CAD files are available at www.pilepro.com/c90

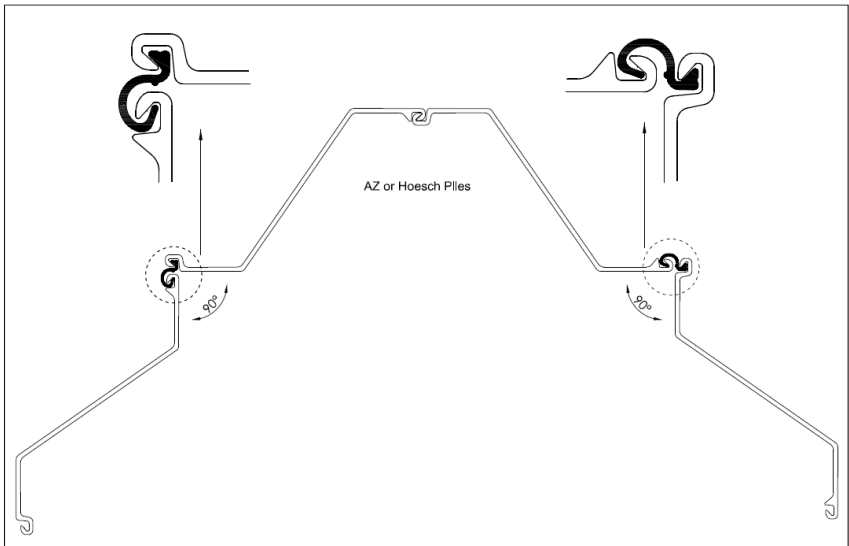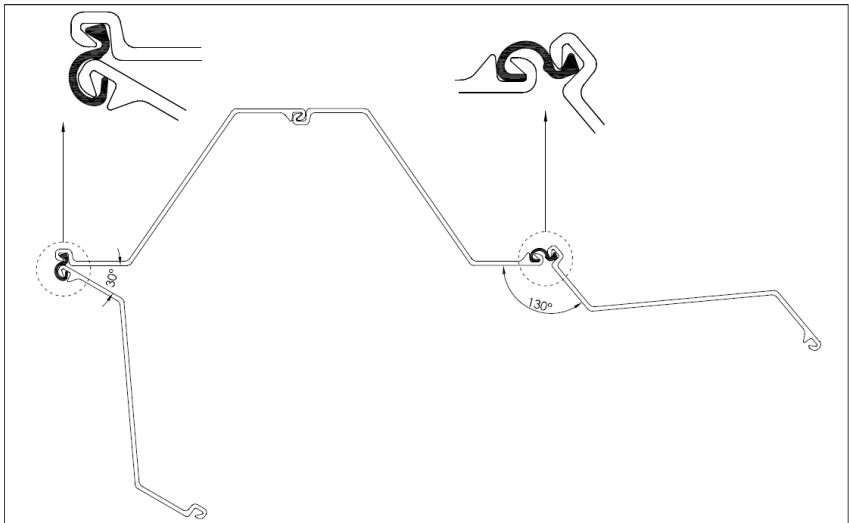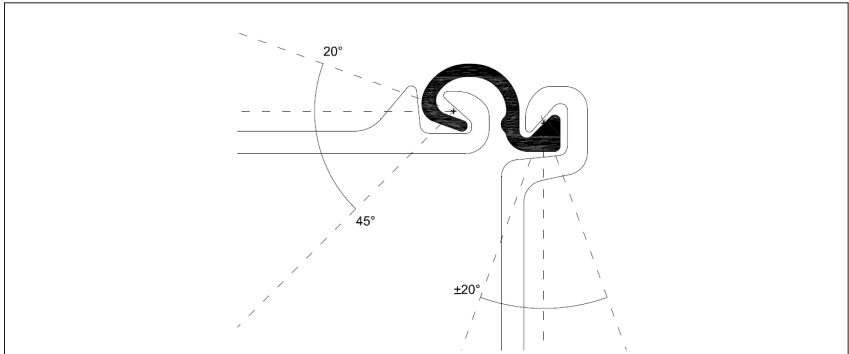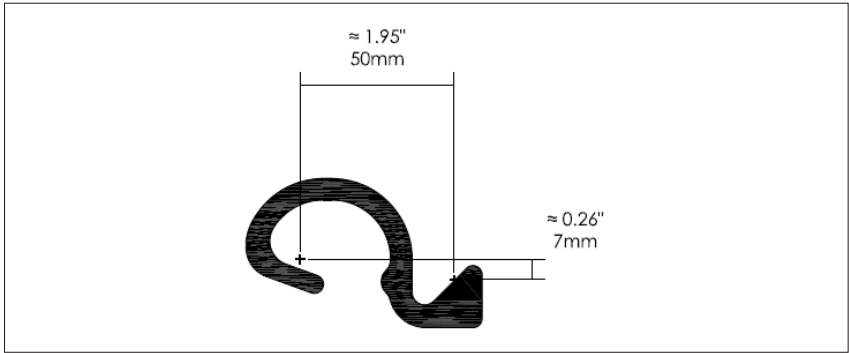

Installation Guidelines

1. Please review proper interlocking examples as shown.
2. Thread the connector into the interlock while the sheet pile is out of the ground.
3. Adjust the connector to the appropriate position.
4. Tack or spot-weld the connector in place (typically a 10" weld attaching the connector to the sheet pile at the top is sufficient).
5. Drive/extract the sheet (with the connector attached) as you would normally.

Please note:

1. Swing or rotation stated are typical but can vary by 10° or more due to rolling tolerances found in sheet pile interlocks.
2. PilePro® connectors are protected by patents.