



Application:

1. IZ and OZ applications.
2. Making corner connections with a weld-on profile, 20° interlock flexibility and AZ sheet pile combined walls.

Typical Properties:





Steelgrade:ASTMA572 Grade 50(S355GP)
Weight: 4.4 lbs/ft

Interlockseal:

Recommended you seal with WADIT® a non-toxic hot cast interlock sealant that is impervious to weather.

CAD-Service:

Downloads of data-sheets and CAD files are available at www.pilepro.com/C9

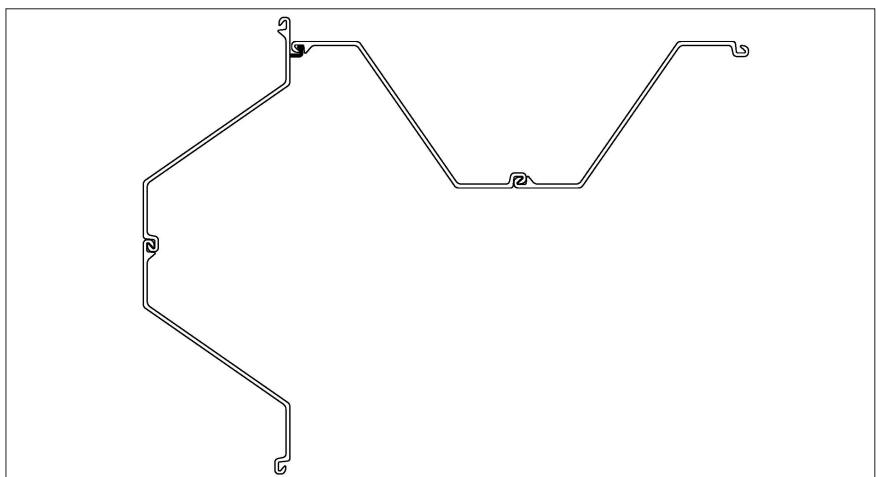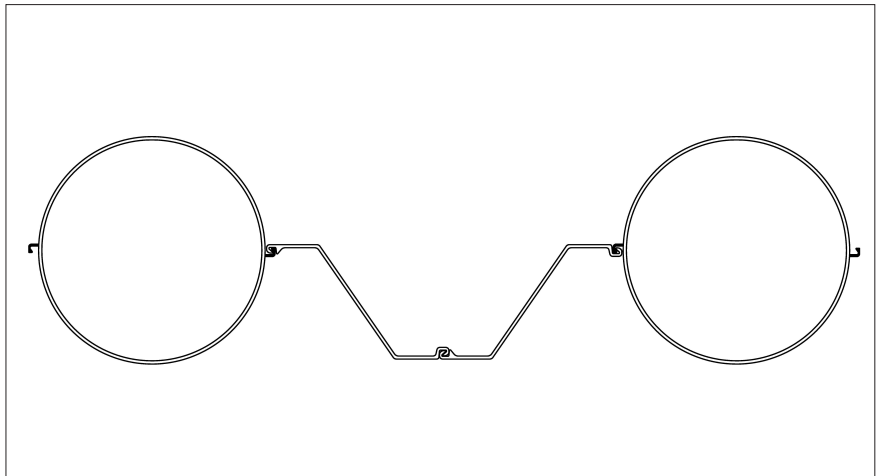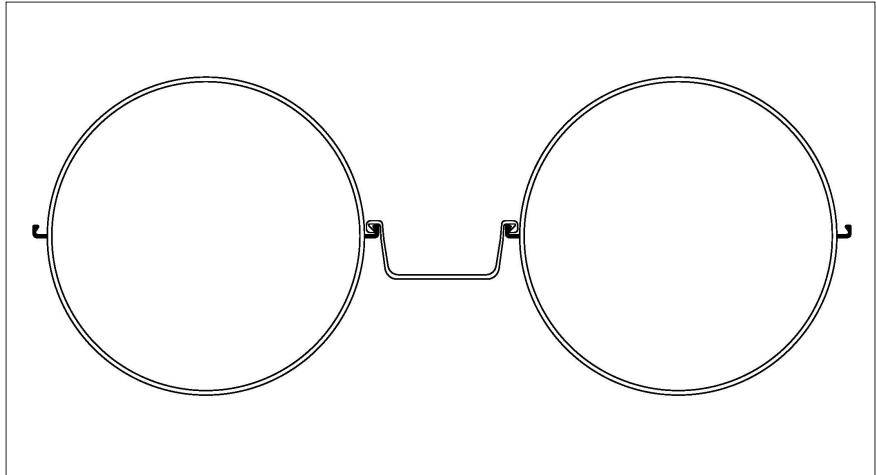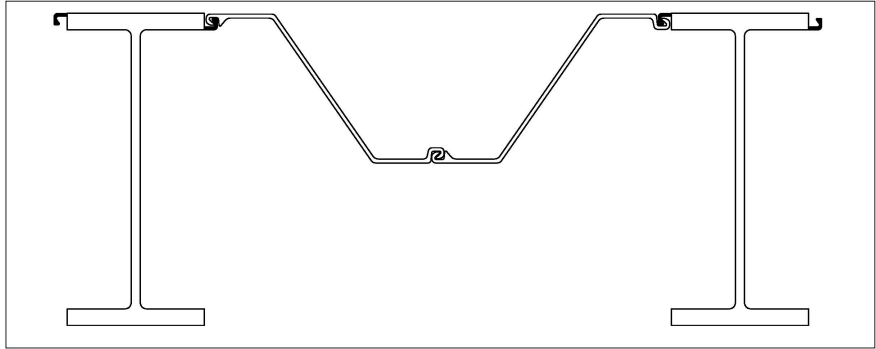

Please note:

1. Swivel ranges and flexibility stated are typical but can vary by 10° or more due to rolling tolerances found in sheet pile interlocks.
2. Profiles can be custom ordered to accommodate a particular steel grade, thickness or other specific requirements.
3. PilePro® connectors comply with EAU recommendations.
4. PilePro® connectors are protected by patents.
5. PilePro® connectors are subject to technical modifications.