


PilePro® Corner Connector: HR® 135

HR® 135 is a Hot Rolled PilePro® connector designed for corner connections with angle range from 95° to 185°. This connector is certified for use with all Larssen Sheet Pile systems.

Key Features

- Angle Range: 95° - 185° corner connections
- Universal Compatibility: All Larssen Sheet Pile systems: Z-Pile HR®, U-Pile HR®, AZ, ZZ etc.
- Hot Rolled Design: PilePro® HR® series
- Certified Quality: PilePro® Certified Sheet Pile Connector

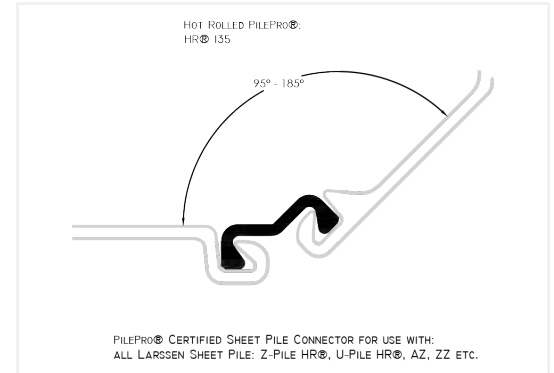

Installation Guidelines

1. Please review proper interlocking examples as shown
2. Thread the connector into the interlock while the sheet pile is out of the ground
3. Adjust the connector to the appropriate position
4. Tack or spot-weld the connector in place (typically a 10" weld attaching the connector to the sheet pile at the top is sufficient)
5. Drive/extract the sheet (with the connector attached) as you would normally

Please Note

- The possibility of adjusting the profiles in the area of the interlock can vary due to size and rolling
- All angles specified are approximations and may vary
- PilePro® connectors are protected by IP
- PilePro® connectors are subject to technical modifications