


# PilePro® Corner Connector: HR® Omega

HR® Omega is a Hot Rolled PilePro® connector designed for corner connections with angle range from 50° to 135°. This connector is certified for use with all Larssen Sheet Pile systems and features an omega-shaped profile.

## Key Features

- Angle Range: 50° - 135° corner connections
- Omega Profile: Specialized omega-shaped design
- Universal Compatibility: All Larssen Sheet Pile systems: Z-Pile HR®, U-Pile HR®, AZ, ZZ etc
- Hot Rolled Design: PilePro® HR® series
- Certified Quality: PilePro® Certified Sheet Pile Connector

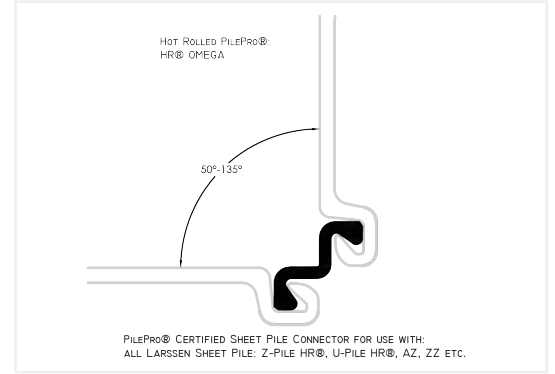

## Installation Guidelines

1. Please review proper interlocking examples as shown
2. Thread the connector into the interlock while the sheet pile is out of the ground
3. Adjust the connector to the appropriate position
4. Tack or spot-weld the connector in place (typically a 10" weld attaching the connector to the sheet pile at the top is sufficient)
5. Drive/extract the sheet (with the connector attached) as you would normally

## Please Note

- The possibility of adjusting the profiles in the area of the interlock can vary due to size and rolling
- All angles specified are approximations and may vary
- PilePro® connectors are protected by IP
- PilePro® connectors are subject to technical modifications